



JEEP JK 2 1/2" PROGRESSIVE COIL KIT W/ PERFORMANCE 2.2. SHOCK ABSORBERS

Thank you for choosing Rough Country for all your suspension needs.

Rough Country recommends a certified technician install this system. In addition to these instructions, professional knowledge of disassemble/reassembly procedures as well as post installation checks must be known. Attempts to install this system without this knowledge and expertise may jeopardize the integrity and/or operating safety of the vehicle.

Please read instructions before beginning installation. Check the kit hardware against the kit content list on this page and the kit layout on the back page. Be sure you have all needed parts and know where they go. Also please review tools needed list and make sure you have the necessary tools to install this kit.

PRODUCT USE INFORMATION

As a general rule, the taller a vehicle is, the easier it will roll. Seat belts and shoulder harnesses should be worn at all times. Avoid situations where a side rollover may occur.

Generally, braking performance and capability are decreased when larger/heavier tires and wheels are used. Take this into consideration while driving. Do not add, alter, or fabricate any factory or after-market parts to increase vehicle height over the intended height of the Rough Country product purchased. Mixing component brands is not recommended.

Rough Country makes no claims regarding lifting devices and excludes any and all implied claims. We will not be responsible for any product that is altered.

This system was developed to provide a level stance to the Jeep after it is lifted. Please note that this lift does not modify the front or rear track bar or its mounting points. This will result in what is generally considered a very insignificant shift in both the front and rear axle of approx 1/4 of an inch. Rough Country offers an optional rear track bar bracket **Part # 1166** to address this. Please call your nearest Rough Country dealer to inquire.

IMPORTANT NOTE : The draglink must be adjusted to center the steering wheel BEFORE the vehicle is driven. Failure to do so will cause a computer error in the Jeep's traction control system.

This suspension system was developed using a 285/75R17" tire with factory wheels. If bigger/wider tire are used with the factory wheels or factory offset wheels you must carefully check the clearance during turning between the tires and the lower control arm and the front sway bar link before driving.

If you have any questions concerning the design, function, and correct use of our products contact us at 800-222-7023.

Kit Contents:

- 2- Front Progressive Coil Springs
- 2- Rear Progressive Coil Springs
- 2- Fr Performance 2.2 Shock Absorbers
- 2- Rr Performance 2.2 Shock Absorbers
- 1--Shock Bag

Tools Needed:

- 10mm Wrench
- 16mm Wrench
- 16mm Socket
- 18mm Wrench
- 18mm Socket
- 19mm Deep Well Socket
- Jack
- Jack Stands

Torque Specs:

Size	Grade 5	Grade 8
3/8"	30 ft/lbs	35 ft/lbs
7/16"	45 ft/lbs	60 ft/lbs
1/2"	65 ft/lbs	90 ft/lbs
9/16"	95 ft/lbs	130 ft/lbs
5/8"	135 ft/lbs	175 ft/lbs
	Class 8.8	Class 10.9
8MM	18ft/lbs	23 ft/lbs
10MM	32ft/lbs	45ft/lbs
12MM	55ft/lbs	75ft/lbs
14MM	85ft/lbs	120ft/lbs

FRONT INSTALLATION INSTRUCTIONS

1. Chock the rear wheels and jack up the front of the vehicle and support the vehicle with jack stands so that the front wheels are off the ground.
2. Using a 19mm deep well socket remove the front tires/wheels,
3. Using a 18mm socket and wrench remove the bottom sway bar bolts. Retain hardware for later use. **See Photo 1**
4. Using a 18mm socket and wrench remove the lower shock bolt. **See Photo 2.** Retain the lower hardware for reuse.

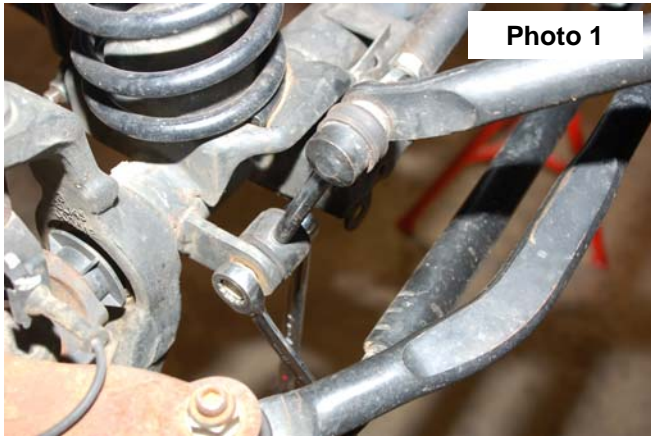


Photo 1

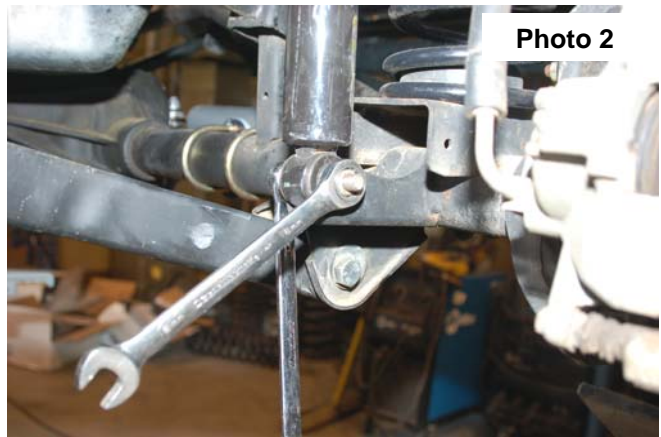


Photo 2

5. Push down on the axle to allow room for the coils to be removed. Remove coil springs, and factory spring isolator.
6. Install the new coil spring in the stock location with the factory isolator as shown **See Photo 3.**
7. Install the new Rough Country Performance 2.2 shocks in the factory location with the factory bolt in the lower shock mount and tighten using a 18mm socket and wrench. **See Photo 4.**
8. Reinstall the front tires/wheels and tighten to factory specifications.
9. Remove the jack stands and lower the vehicle to the ground. **Install the sway bar links on the sway bar using factory hardware using a 18mm wrench after the vehicle is on the ground. Do not install the sway bar link on the sway bar until the sway bar is on the ground.**



Photo 3


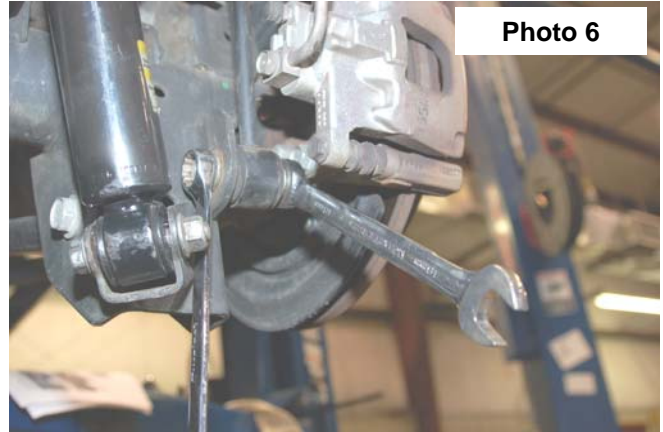


Photo 4


10. The draglink must be adjusted to center the steering wheel **BEFORE** the vehicle is driven. Failure to do so will cause a computer error with the Jeep's traction control system and will result in odd handling and poor performance.

REAR INSTALLATION INSTRUCTIONS


1. Chock front wheels and jack up the rear of the vehicle and support the vehicle with jack stands so that the rear wheels are off the ground.
2. Remove the rear tires/wheels, using a 19mm deep well socket.
3. Remove the upper shock bolt using a 16mm socket and wrench. Remove the lower shock bolt using a 18mm socket and wrench and remove the factory shock. **See Photo 5.** Retain the lower shock hardware for reuse.
4. Using a 18mm socket and wrench remove the bottom sway bar bolts. Retain hardware for later use. **See Photo 6.**

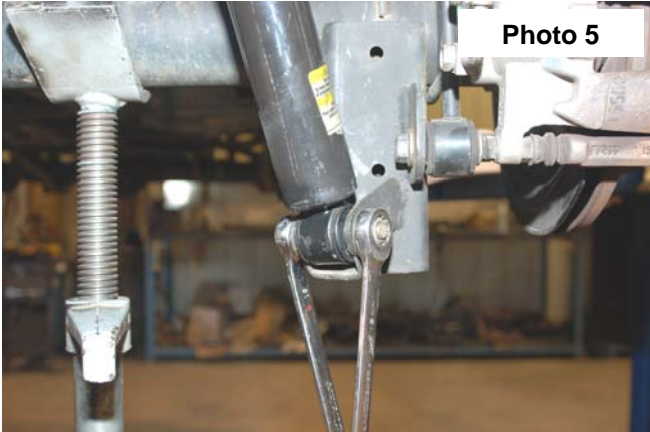

5. Using a 10mm wrench remove the bolt holding the brake line to the frame. **See Photo 7.** Push down on the axle to allow enough room for stock coil spring to be removed. Remove the stock coil spring and isolator.
6. Install the stock isolator on the top of the new coil spring. **See Photo 8.**

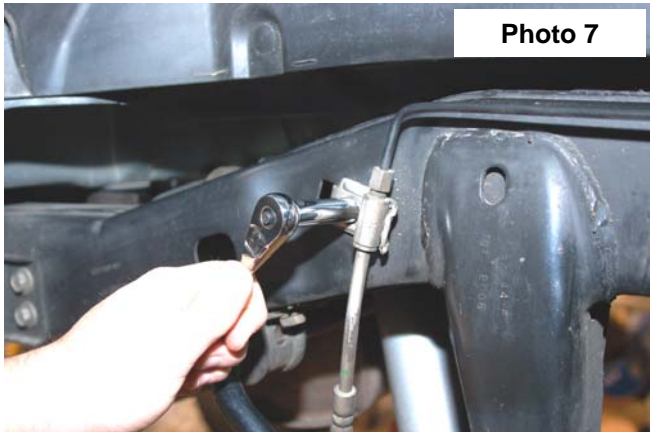

7. Install the new Rough Country coil spring in the factory coil mount as shown in **Photo 9.**
8. Install the rear Rough Country Performance 2.2 shock in the factory location using the factory hardware. Tighten the upper mount using a 16mm wrench and a 18mm wrench for the lower.
9. Reinstall the rear tires/wheels and tighten to factory specifications. Lower the vehicle to the ground.

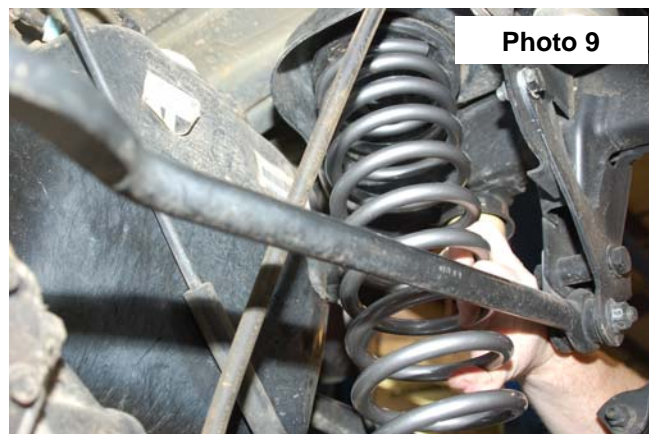

POST INSTALLATION

1. Check all fasteners for proper torque. Check to ensure there is adequate clearance between all rotating, mobile, fixed and heated members. Check steering for interference and proper working order. Test brake system.
2. Perform steering sweep. The distance between the tire sidewall and the brake hose must be checked closely. Cycle the steering from full turn to full turn to check for clearance. Failure to perform inspections may result in component failure.
3. The draglink **must be adjusted to center the steering wheel BEFORE the vehicle is driven**. Failure to do so will cause a computer error with the Jeeps traction control system and result in odd handling and poor performance.
4. Using an certified alignment professional with experience in aligning lifted vehicles, get an alignment done to factory specifications.
5. Readjust headlights to proper settings.

MAINTENACE INFORMATION

It is the ultimate buyers responsibility to have all bolts/nuts checked for tightness after the first 500 miles and then every 1000 miles. Wheel alignment steering system, suspension and driveline systems must be inspected by a qualified professional mechanic at least every 3000 miles.

NOTICE TO DEALER AND VEHICLE OWNER

Any vehicle equipped with any Rough Country product should have a "Warning to Driver" decal installed on the inside of the windshield or on the vehicle's dash. The decal should act as a constant reminder for whoever is operating the vehicle of its unique handling characteristics.

INSTALLING DEALER - it is your responsibility to install the warning decal and forward these installation instructions on to the vehicle owner for review. These instructions should be kept in the vehicle for its service life.

KIT COMPONENTS

Front Performance 2.2 Shock Absorbers

Front Coils



Rear Performance 2.2 Shock Absorbers

Rear Coils

Thank you for purchasing a Rough Country 2 1/2" lift for your Jeep JK.

**ROUGH
COUNTRY**
SUSPENSION SYSTEMS